

# CMI-CDP10040NH-SERIES



## Features


- ▶ High current and low profile.
- ▶ Available tape and reel for auto insertion
- ▶ Simple and Shield structure.
- ▶ Halogen-Free
- ▶ AEC-Q200 qualified.
- ▶ Halogen-Free



## Applications


- ▶ Car navigation, car stereo and car accessories only  
(Not available for use related to driving, curving, stopping, and the other safety.)

### Dimension (Unit:mm)

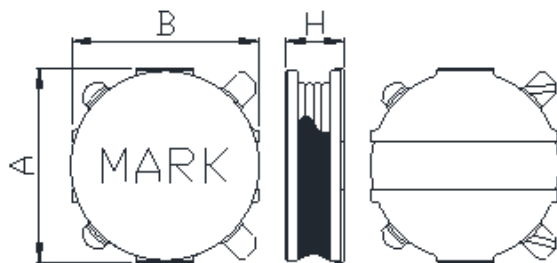

A	B	H
10.0±0.3	10.0±0.3	4.0Max

### Land Pattern (Unit:mm)



L	G	H
11.0	5.6	4.6

## Specifications

Part Number	Inductance (uH) ±20%	DCR(mohm) Max.	IDC1(A) Max.	IDC2(A) Max.	Test Frequency (Hz)
CMI-CDP10040NH-220M	22	73	2.90	2.50	100k

- IDC1: When based on the inductance change rate (approximately 30% below in the initial value)
- IDC2: When based on the temperature increase (Temperature increase of approximately 40°C by self heating)
- Operating Temperature Range(including self temperature) : -40°C ~ +165 °C

Ilisan Sales Office (KOREA) +82)31-904-1444  
 Shenzhen Sales Office (CHINA) +86)755-8663-6929  
 Hungary Sales office (EUROPE) +36)30-913-7706

H.K Sales Office (HONGKONG) +852)2711-5551  
 LA Sales Office (USA) +1)866-446-3586

• You can also contact us by e-mail : [coilmaster@coilmaster.com](mailto:coilmaster@coilmaster.com)

- All specifications are subject to change without notice.
- Update date : 2015.11.18

[www.coilmaster.com](http://www.coilmaster.com)