

CMI-CDP8040NF-SERIES



Features


- ▶ High current and low profile.
- ▶ Available tape and reel for auto insertion
- ▶ Simple and Shield structure.

Applications

- ▶ Equipment using for automotive
(ECM, airbags, headlights, electronic powder steering, motors, ABS, other)




Dimension (Unit:mm)

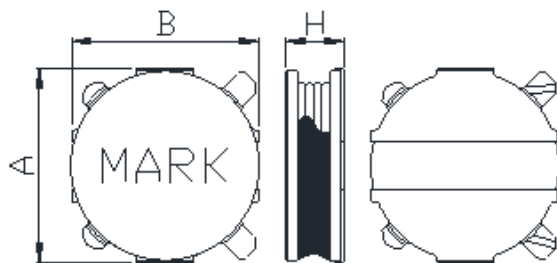

A	B	H
8.0±0.2	8.0±0.2	4.0Max

Land Pattern (Unit:mm)



L	G	H
8.2	3.8	7.5

Specifications

Part Number	Inductance (uH) ±20%	DCR(mohm) Max.(Typ.)	IDC1(A) Max.(Typ.)	IDC2(A) Max.(Typ.)	Test Frequency (Hz)
CMI-CDP8040NF-6R8M	6.8	30(25)	5.40(5.60)	5.50(5.90)	100k
CMI-CDP8040NF-680M	68	240(200)	1.50(1.60)	1.50(1.60)	100k
CMI-CDP8040NF-221M	220	770(700)	1.00(1.06)	1.00(1.06)	100k
CMI-CDP8040NF-681M	680	2365(2150)	0.60(0.64)	0.58(0.62)	100k

- IDC1: When based on the inductance change rate (approximately 30% below in the initial value)
- IDC2: When based on the temperature increase (Temperature increase of approximately 40°C by self heating)
- Operating Temperature Range(including self temperature) : -40°C ~ +165 °C

Ilsan Sales Office (KOREA)

+82)31-904-1444

coilmaster@coilmaster.com

H.K Sales Office (HONGKONG)

+852)2711-5551

coilmaster@coilmaster.com

Shenzhen Sales Office (CHINA)

+86)755-8663-6929

coilmaster@coilmaster.com

LA Sales Office (USA)

+1)866-446-3586

coilmaster@coilmaster.com

Hungary Sales office (EUROPE)

+36)30-913-7706

coilmaster@coilmaster.com

- All specifications are subject to change without notice.
- Update date : 2018.03.06

www.coilmaster.com