

CMI-CMMPP4030HL-SERIES



Features


- ▶ Small size, high current and low profile.
- ▶ Metal powder molding type for EMC protection.
- ▶ Lower DCR with applying flat wire.
- ▶ Available tape and reel for auto insertion.
- ▶ Halogen-Free
- ▶ RoHS compliant.
- ▶ AEC-Q200 qualified.



Applications


- ▶ Equipment using for automobiles (ECM, airbags, headlights, electronic Powder steering, motors, ABS, other)

Dimension (Unit:mm)

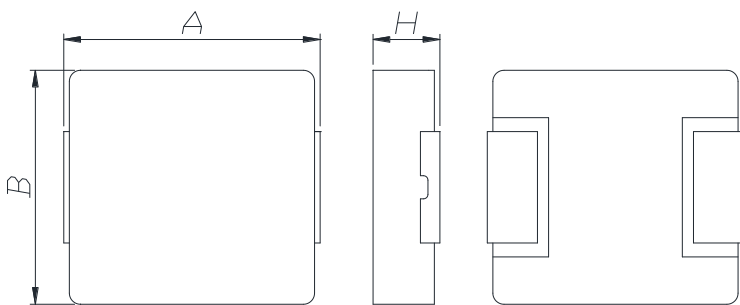

A	B	H
4.4±0.35	4.2±0.25	3.0 Max

Land Pattern (Unit:mm)



L	G	H
4.8	1.6	2.0

Specifications

Part Number	Inductance (uH) ±20%	DCR(mohm) Max(Typ)	IDC1(A) Max(Typ)	IDC2(A) Max(Typ)	Test Frequency (Hz)
CMI-CMMPP4030HL-4R7M	4.7	72(60)	3.80(4.10)	3.20(3.60)	1M
CMI-CMMPP4030HL-6R8M	6.8	84(70)	3.50(3.90)	2.70(3.00)	1M
CMI-CMMPP4030HL-100M	10	154(128)	3.30(3.70)	2.20(2.50)	1M
CMI-CMMPP4030HL-150M	15	312(260)	2.10(2.30)	1.40(1.60)	1M

- IDC1: When based on the inductance change rate (approximately 30% below in the initial value)
- IDC2: When based on the temperature increase (Temperature increase of approximately 40°C by self heating)
- Operating Temperature Range(including self temperature) : -40°C ~ +165 °C

Ilisan Sales Office (KOREA) +82)31-904-1444 H.K Sales Office (HONGKONG) +852)2711-5551
 Shenzhen Sales Office (CHINA) +86)755-8663-6929 LA Sales Office (USA) +1)866-446-3586
 Hungary Sales office (EUROPE) +36)30-913-7706

▪ You can also contact us by e-mail : coilmaster@coilmaster.com

- All specifications are subject to change without notice.
- Update date : 2018.10.25

www.coilmaster.com