

CMI-CMMPP5030LH-SERIES



Features


- ▶ High current and low profile.
- ▶ Metal powder molding type for EMC protection.
- ▶ Available tape and reel for auto insertion.
- ▶ RoHS compliant
- ▶ AEC-Q200 qualified.
- ▶ Halogen-Free

Applications

- ▶ Equipment using for automobiles (ECM, airbags, headlights, electronic Powder steering, motors, ABS, other)




Dimension (Unit:mm)

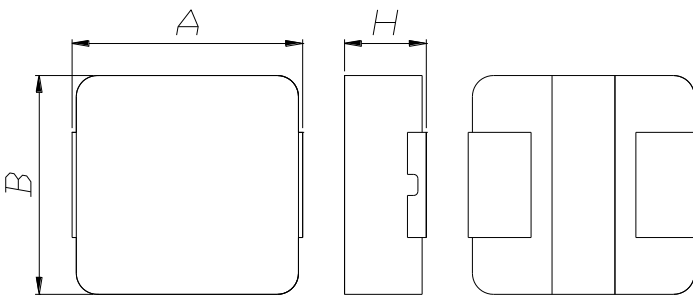

A	B	H
5.4±0.35	5.2±0.25	3.0 Max

Land Pattern (Unit:mm)



L	G	H
6.0	2.2	2.5

Specifications

Part Number	Inductance (uH) ±20%	DCR(mohm) Max(Typ)	IDC1(A) Max(Typ)	IDC2(A) Max(Typ)	Test Frequency (Hz)
CMI-CMMPP5030LH-1R0M	1.0	18(15)	18.00(20.00)	7.50(8.00)	1M
CMI-CMMPP5030LH-2R2M	2.2	36(30)	12.50(14.00)	5.70(6.20)	1M
CMI-CMMPP5030LH-3R3M	3.3	48(40)	10.50(11.50)	4.80(5.30)	1M
CMI-CMMPP5030LH-4R7M	4.7	60(50)	7.50(8.50)	3.80(4.00)	1M

- IDC1: When based on the inductance change rate (approximately 30% below in the initial value)
- IDC2: When based on the temperature increase (Temperature increase of approximately 40°C by self heating)
- Operating Temperature Range(including self temperature) : -40°C ~ +165 °C

Ilisan Sales Office (KOREA) +82/31-904-1444
 Shenzhen Sales Office (CHINA) +86/755-8663-6929
 Hungary Sales office (EUROPE) +36/30-913-7706

H.K Sales Office (HONGKONG) +852/2711-5551
 LA Sales Office (USA) +1/866-446-3586

• You can also contact us by e-mail : coilmaster@coilmaster.com

- All specifications are subject to change without notice.
- Update date : 2017.11.03

www.coilmaster.com