

CMI-CSSP12080NF-SERIES



Features


- ▶ Magnetic shield type wound inductor for power circuits.
- ▶ Available tape and reel for auto insertion.
- ▶ RoHS compliant
- ▶ AEC-Q200 qualified.

Applications

- ▶ Equipment using for automobiles (ECM, airbags, headlights, electronic Powder steering, motors, ABS, other)




Dimension (Unit:mm)

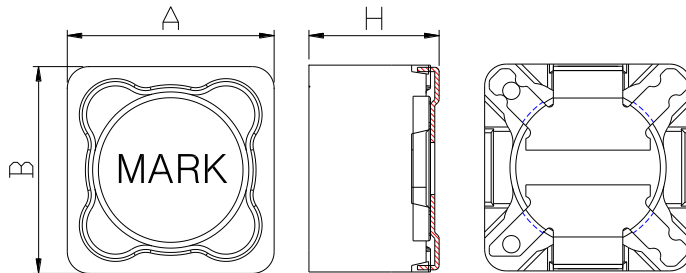

A	B	H
12.0±0.3	12.0±0.3	8.0 Max

Land Pattern (Unit:mm)

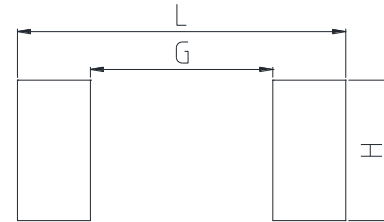

L	G	H
12.6	7.0	5.4

Specifications

Part Number	Inductance (uH)	Tolerance (±)	DCR (mohm) ±20%	IDC1(A) Max	IDC2(A) Max	Test Frequency (Hz)
CMI-CSSP12080NF-250M	25	20%	54	4.70	4.70	100k
CMI-CSSP12080NF-450M	45	20%	75	3.70	4.00	100k
CMI-CSSP12080NF-820M	82	20%	110	3.00	3.30	100k

- IDC1: When based on the inductance change rate (approximately 30% below in the initial value)
- IDC2: When based on the temperature increase (Temperature increase of approximately 40°C by self heating)
- Operating Temperature Range(including self temperature) : -40°C ~ +165 °c

Ilsan Sales Office (KOREA)
 H.K Sales Office (HONGKONG)
 Shenzhen Sales Office (CHINA)
 LA Sales Office (USA)
 Hungary Sales office (EUROPE)

+82)31-904-1444
 +852)2711-5551
 +86)755-8663-6929
 +1)866-446-3586
 +36)30-913-7706

coilmaster@coilmaster.com
coilmaster@coilmaster.com
coilmaster@coilmaster.com
coilmaster@coilmaster.com
coilmaster@coilmaster.com

- All specifications are subject to change without notice.
- Update date : 2017.12.22