

CMI-CSSP5030NF-SERIES



Features


- ▶ Magnetic shield type wound inductor for power circuits.
- ▶ Available tape and reel for auto insertion.
- ▶ RoHS compliant
- ▶ AEC-Q200 qualified.

Applications

- ▶ Equipment using for automobiles (ECM, airbags, headlights, electronic Powder steering, motors, ABS, other)




Dimension (Unit:mm)

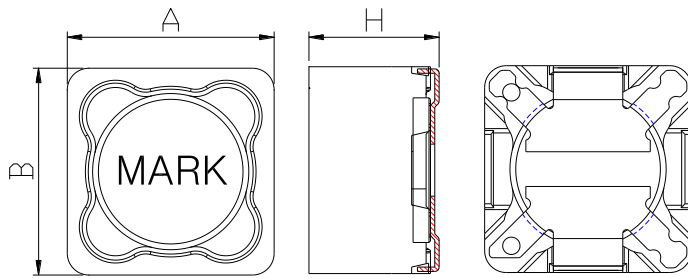

A	B	H
5.0±0.2	5.0±0.2	3.0Max

Land Pattern (Unit:mm)

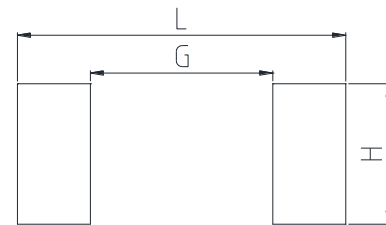

L	G	H
5.6	2.6	2.0

Specifications

Part Number	Inductance (uH)	Tolerance (±)	DCR (mohm) ±20%	IDC1(A) Max	IDC2(A) Max	Test Frequency (Hz)
CMI-CSSP5030NF-4R7M	4.7	20%	61	2.70	2.50	100k
CMI-CSSP5030NF-100M	10	20%	96	1.90	2.10	100k

- IDC1: When based on the inductance change rate (approximately 30% below in the initial value)
- IDC2: When based on the temperature increase (Temperature increase of approximately 40°C by self heating)
- Operating Temperature Range(including self temperature) : -40°C ~ +165 °C

Ilisan Sales Office (KOREA)

+82)31-904-1444

coilmaster@coilmaster.com

H.K Sales Office (HONGKONG)

+852)2711-5551

coilmaster@coilmaster.com

Shenzhen Sales Office (CHINA)

+86)755-8663-6929

coilmaster@coilmaster.com

LA Sales Office (USA)

+1)866-446-3586

coilmaster@coilmaster.com

Hungary Sales office (EUROPE)

+36)30-913-7706

coilmaster@coilmaster.com

- All specifications are subject to change without notice.
- Update date : 2017.12.08