

CME-FLF19CB-SERIES



Features

- ▶ Low stray capacitance.
- ▶ High attenuation of a wide frequency band.
- ▶ Low leakage inductance.
- ▶ Automatic winding.
- ▶ No danger of the layer short for the single layer winding


Picture



Application

- ▶ TV, Monitor, Audio, Adaptor, DVD, PC SMPS & Any Power

Dimension (Unit:mm)

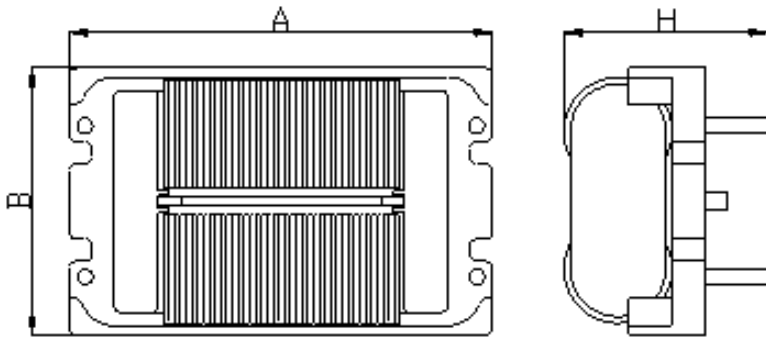

A	B	H
23 Max.	22 Max.	14 Max.

Specifications

- ▶ Rated voltage : AC/DC free voltage
- ▶ Operating temperature : -25℃ ~ 120℃
- ▶ Withstanding voltage : AC 1.5 KV at 1 minute
- ▶ Insulation resistance : 100MΩ Min, at DC500 V

Part No.	Inductance (mH)	Rated Current (A)	Type	Remarks
CME-FLF19CB-030-006V	6	3.0	Horizontal	Horizontal Type Development In progress
CME-FLF19CB-020-010V	10	2.0		
CME-FLF19CB-015-016V	16	1.5		

Ilsan Sales Office (KOREA)
 H.K Sales Office (HongKong)
 Shenzhen Sales Office (CHINA)
 LA Sales Office (USA)
 Hungary Sales office (EUROPE)

+82)31-904-1444
 +852)2711-5551
 +0755-8663-6929
 +1)866-446-3586
 +36)30-521-7818

coilmaster@coilmaster.com
coilmaster@coilmaster.com
kimha@coilmaster.com
markyang@coilmaster.com
coilmaster@coilmaster.com

- All specifications are subject to change without notice.
- Update date : 2016.04.22