


CMI-CPQ2009-SERIES



Picture




Features

- ▶ Magnetically shielded
- ▶ High current and low profile.
- ▶ Flat wire wound
- ▶ Extra solder pad for increased mechanical stability
- ▶ RoHS compliant
- ▶ AEC-Q200 qualified.

Applications


- ▶ Equipment using for automobiles (ECM, Airbags, Headlights, Electronic Power Steering, Motors, ABS, other)

Dimension (Unit:mm)

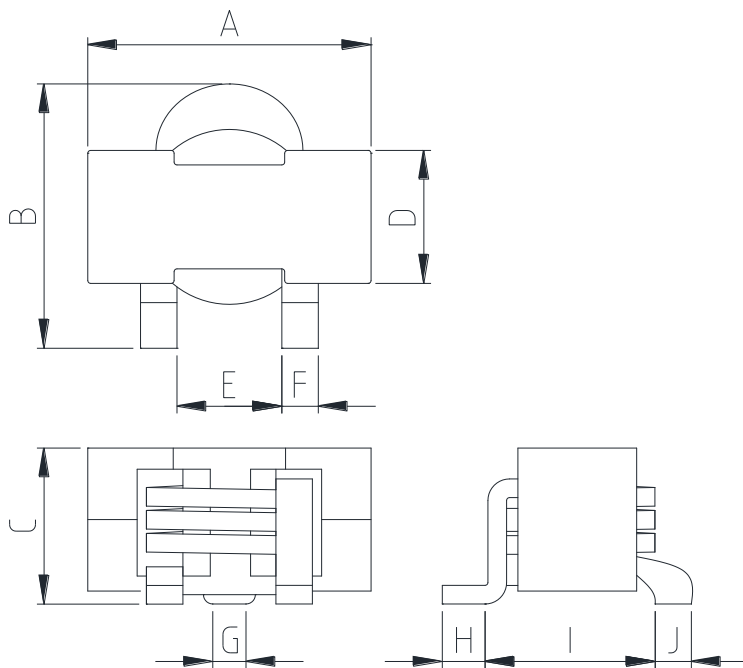

A	B	C	D	E
19.18±0.51	18.70±0.86	8.64 Max	9.27±0.51	7.90±0.38
F	G	H	I	J
2.54±0.076	3.30 ref.	3.18 ref.	13.08±0.37	2.54 ref.

Land Pattern (Unit:mm)

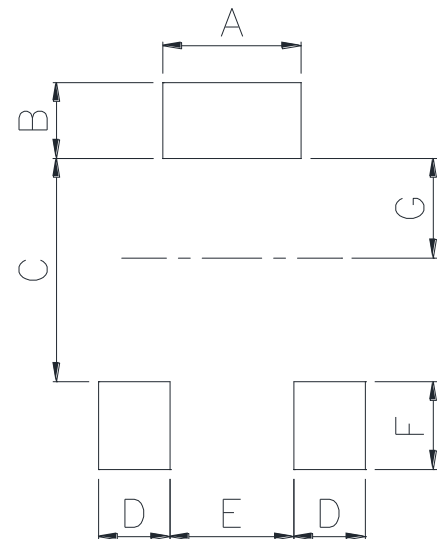

A	B	C	D
7.37	4.06	11.94	3.81
E	F	G	
6.60	4.70	5.33	

- You can also contact us by e-mail : coilmaster@coilmaster.com
- All specifications are subject to change without notice.
- Update date : 2018.04.30

Specifications

Part No.	Inductance (μ H) $\pm 20\%$	DCR (m Ω) Max.(Typ.)	Isat (A)	Itemp (A)		SRF (MHz) Typ.
			10% drop	20 °C rise	40 °C rise	
CMI-CPQ2009-R30M	0.30	0.74(0.63)	100	41	54	550
CMI-CPQ2009-R50M	0.50	0.74(0.63)	60	41	54	544
CMI-CPQ2009-R60M	0.60	0.74(0.63)	49	41	54	648
CMI-CPQ2009-R68M	0.68	0.74(0.63)	45	41	54	454
CMI-CPQ2009-R80M	0.80	0.74(0.63)	38	41	54	567
CMI-CPQ2009-R90M	0.90	0.74(0.63)	33	41	54	557
CMI-CPQ2009-1R0M	1.00	0.74(0.63)	29	41	54	488
CMI-CPQ2009-1R2M	1.20	0.74(0.63)	28	41	54	81
CMI-CPQ2009-2R0M	2.00	0.74(0.63)	16	41	54	40

- Inductance measured at 100kHz, 0.1Vrms
- Isat1 : DC current at 25°C that causes a 10% (typ) inductance drop from its value without current.
- Itemp : Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
- Ambient temperature -40°C to $+85^{\circ}\text{C}$ with (40°C rise) Itemp current.
- Maximum part temperature $+125^{\circ}\text{C}$ (ambient + temp rise). Derating.
- Storage temperature Component: -40°C to $+125^{\circ}\text{C}$.

Ilisan Sales Office (KOREA) +82)31-904-1444
 Shenzhen Sales Office (CHINA) +86)755-8663-6929
 Hungary Sales office (EUROPE) +36)30-913-7706

H.K Sales Office (HONGKONG) +852)2711-5551
 LA Sales Office (USA) +1)866-446-3586

▪ **You can also contact us by e-mail : coilmaster@coilmaster.com**

- All specifications are subject to change without notice.
- Update date : 2018.04.30

www.coilmaster.com