

CMI-CPQ2918HC-SERIES



Picture




Features

- ▶ Magnetically shielded
- ▶ High current and low profile.
- ▶ Flat wire wound
- ▶ Extra solder pad for increased mechanical stability
- ▶ RoHS compliant
- ▶ AEC-Q200 qualified.

Applications


- ▶ Equipment using for automobiles (ECM, Airbags, Headlights, Electronic Power Steering, Motors, ABS, other)

Dimension (Unit:mm)

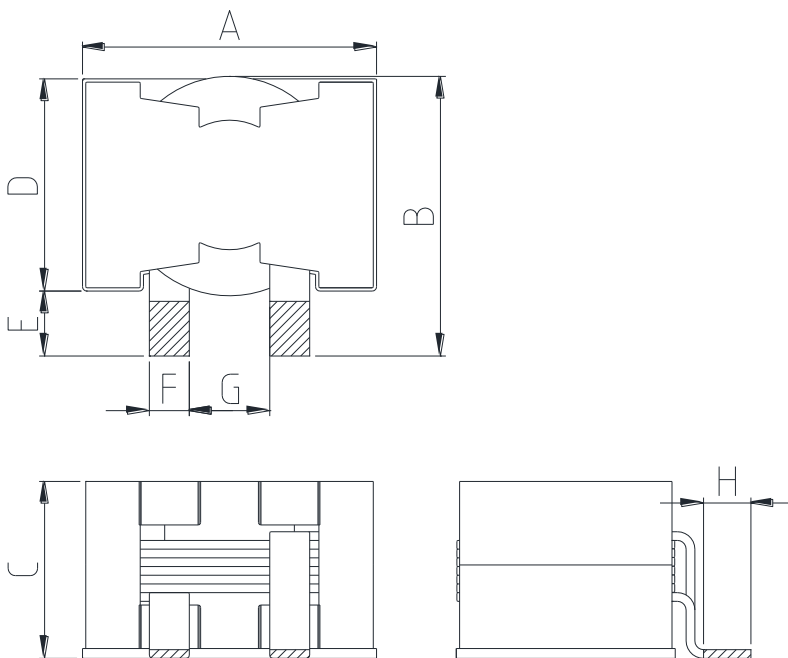

A	B	C	D	E
27.9 Max.	28.5 Max.	17.78 Max	19.8 Max	6.90 ref.
F	G	H		
3.80 ref.	6.63±0.51	3.80 Min.		

Land Pattern (Unit:mm)

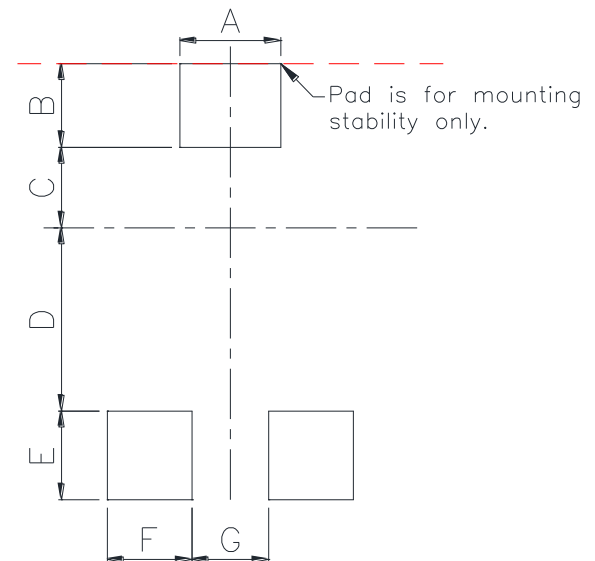

A	B	C	D
6.35	5.28	5.08	11.56
E	F	G	
5.59	5.33	4.82	

- You can also contact us by e-mail : coilmaster@coilmaster.com
- All specifications are subject to change without notice.
- Update date : 2020.07.21

Specifications

► HC type (High Current)

Part No.	Inductance (μ H) $\pm 10\%$	DCR (m Ω) Max.(Typ.)	Isat (A)			Itemp (A)	
			10% drop	20% drop	30% drop	20 °C rise	40 °C rise
CMI-CPQ2918HC-3R3K	3.3	2.86(2.60)	91.0	92.5	93.6	20	28
CMI-CPQ2918HC-4R7K	4.7	2.86(2.60)	59.0	61.2	62.4	20	28
CMI-CPQ2918HC-6R8K	6.8	2.86(2.60)	42.0	45.0	45.9	20	28
CMI-CPQ2918HC-100K	10	2.86(2.60)	28.0	31.2	32.1	20	28
CMI-CPQ2918HC-150K	15	2.86(2.60)	18.0	21.2	21.9	20	28
CMI-CPQ2918HC-220K	22	2.86(2.60)	12.0	14.0	15.0	20	28
CMI-CPQ2918HC-330K	33	2.86(2.60)	7.0	8.7	9.6	20	28

- Inductance measured at 500kHz, 0.1Vrms
- Isat1 : DC current at 25°C that causes the specified inductance drop from its value without current.
When Isat rating is less than Itemp, Isat is the more critical specification.
- Itemp : Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
- Ambient temperature -40°C to +85°C with (40°C rise) Itemp current.
- Maximum part temperature +125°C (ambient + temp rise). Derating.
- Storage temperature Component: -40°C to +125°C.

IIsan Sales Office (KOREA) +82)31-904-1444
 Shenzhen Sales Office (CHINA) +86)755-8663-6929
 Hungary Sales office (EUROPE) +36)30-913-7706

H.K Sales Office (HONGKONG) +852)2711-5551
 LA Sales Office (USA) +1)866-446-3586

▪ **You can also contact us by e-mail : coilmaster@coilmaster.com**

- All specifications are subject to change without notice.
- Update date : 2020.07.21

www.coilmaster.com