


CMI-MMP252010BC-SERIES

Features


- ▶ Small size and Low profile.
- ▶ Compact design.
- ▶ Metal powder molding type for EMC protection.
- ▶ Available tape and reel for auto insertion.
- ▶ Halogen-Free.
- ▶ RoHS compliant.

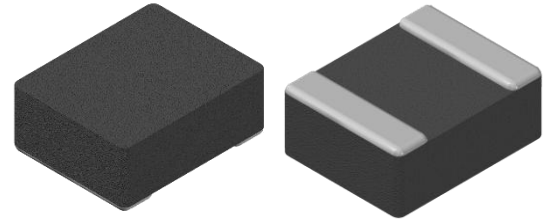

Applications


- ▶ For DC/DC converter
(PMIC, Mobile phone, Tablet, TV, Audio, Display, HDD, SSD etc.)

Dimension (Unit:mm)

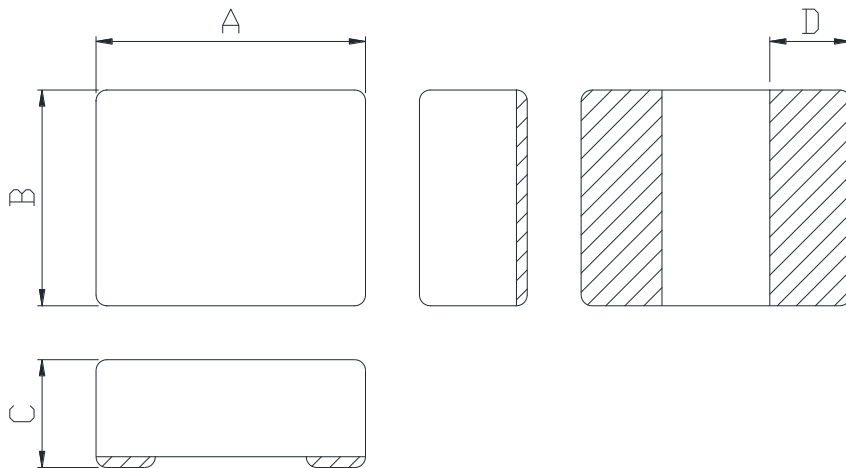

A	B	C	D
2.5 ±0.2	2.0 ±0.2	1.0 Max.	0.75 ±0.25

Land Pattern (Unit:mm)

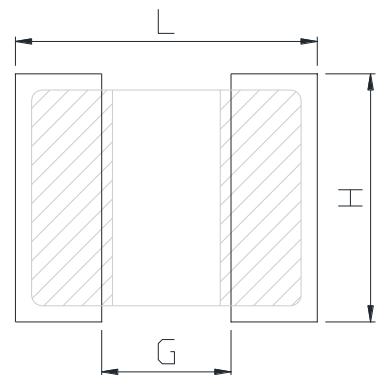

L	G	H
2.8	1.2	2.3

- You can also contact us by e-mail: coilmaster@coilmaster.com
- All specifications are subject to change without notice.
- Update date: 2026.09.21 (Rev.1.1)

Regulation of part number

CMI	-	MMP	252010	BC	-	R24	M
①		②	③	④		⑤	⑥

- ① CoilMaster's initial
- ② Series Name : Metal Molded Power inductor
- ③ Core Size (unit:mm)
- ④ Type
- ⑤ Typical inductance value (0.24 uH)
- ⑥ Inductance tolerance ($\pm 20\%$)

Specifications

Part Number	Inductance (uH) $\pm 20\%$	DCR(mohm) Max.(Typ.)	Isat(A) Max.(Typ.)	Itemp(A) Max.(Typ.)	Test Frequency (Hz)
CMI-MMP252010BC-R24M	0.24	20(17)	8.40(9.20)	6.00(6.30)	1M
CMI-MMP252010BC-R47M	0.47	38.4(32)	6.60(7.20)	3.30(3.70)	1M
CMI-MMP252010BC-R68M	0.68	50.4(42)	5.20(5.70)	3.20(3.60)	1M
CMI-MMP252010BC-1R0M	1.0	66(55)	4.20(4.80)	2.70(3.00)	1M
CMI-MMP252010BC-1R2M	1.2	80(66)	3.60(4.00)	2.30(2.60)	1M
CMI-MMP252010BC-1R5M	1.5	90(75)	3.40(3.80)	2.20(2.50)	1M
CMI-MMP252010BC-2R2M	2.2	120(100)	3.00(3.40)	1.80(2.00)	1M
CMI-MMP252010BC-3R3M	3.3	174(145)	2.20(2.50)	1.60(1.80)	1M
CMI-MMP252010BC-4R7M	4.7	288(240)	1.30(1.50)	1.20(1.40)	1M
CMI-MMP252010BC-6R8M	6.8	360(300)	1.10(1.30)	1.00(1.20)	1M

- Isat: When based on the inductance change rate (Approximately 30% below in the initial value)
- Itemp: When based on the temperature increase (Temperature increase of approximately 40°C by self heating)
- Operating Temperature Range (including self temperature) : -40°C ~ +125 °C

Note 1: Circuit design, component placement, PCB trace size and thickness, airflow and other cooling. Provision all affect the part Temperature. Part temperature should be verified in the end application.


▪ You can also contact us by e-mail: coilmaster@coilmaster.com

- All specifications are subject to change without notice.
- Update date: 2026.09.21 (Rev.1.1)

Packaging


(1) Package quantity: 3,000 (pcs/reel)

(2) Reel Dimensions (unit:mm)

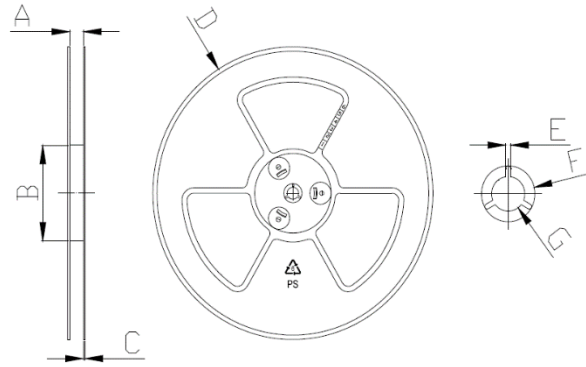

A	B	C	D	E	F	G
8.50	60.0	1.50	178.0	2.70	22.50	13.50
+0.50	+2.00	+0.20	+1.00	+0.30	+0.50	+0.50
-0.50	-2.00	-0.20	-1.00	-0.30	-0.50	-0.50

(3) Tape Dimensions

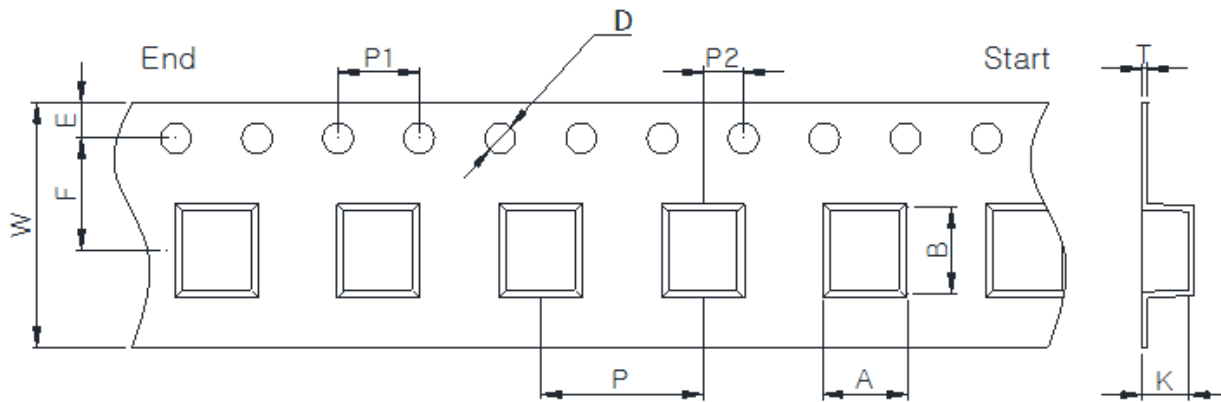

W	A	B	K	E	F	P	P1	P2	D	T
8.00	2.35	2.80	1.10	1.75	3.50	4.00	4.00	2.00	1.50	0.25
+0.10	+0.10	+0.10	+0.10	+0.15	+0.10	+0.10	+0.10	+0.05	+0.10	+0.05
-0.10	-0.10	-0.10	-0.10	-0.10	-0.10	-0.10	-0.10	-0.05	-0.00	-0.05

Korea Sales Office (KOREA) +82)31-904-1444
 China Sales Office (CHINA) +86)0758-683-1444
 Hungary Sales office (EUROPE) +36)1-404-5832

H.K Sales Office (HONGKONG) +852)2711-5551
 LA Sales Office (USA) +1)714-616-6989

• You can also contact us by e-mail: coilmaster@coilmaster.com

- All specifications are subject to change without notice.
- Update date: 2026.09.21 (Rev.1.1)

www.coilmaster.com