


# CMI-PQ2011-SERIES



## Picture




## Features

- ▶ Magnetically shielded
- ▶ High current and low profile.
- ▶ Flat wire wound
- ▶ Extra solder pad for increased mechanical stability
- ▶ RoHS compliant
- ▶ Halogen Free

## Applications


- ▶ For DC/DC converter (LED/OLED TV, Tablet, Display, Graphic, Note PC, Settop, etc)

## Dimension (Unit:mm)

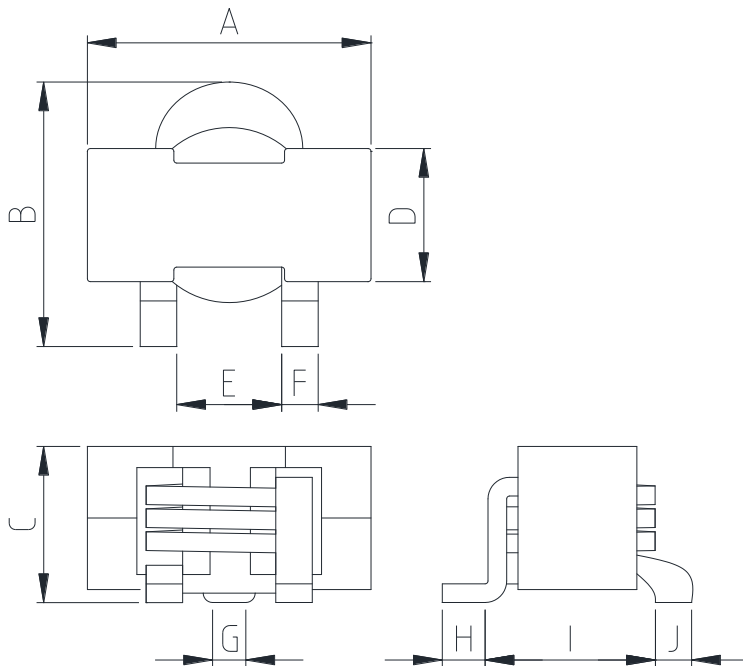

A	B	C	D	E
19.18±0.51	18.70±0.86	10.67 Max	9.27±0.51	7.90±0.38
F	G	H	I	J
2.54±0.076.	3.30 ref.	3.18 ref.	13.08±0.37	2.54 ref.

## Land Pattern (Unit:mm)

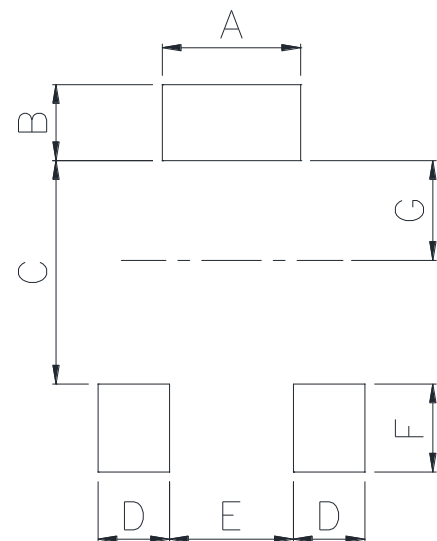

A	B	C	D
7.37	4.06	11.94	3.81
E	F	G	
6.60	4.70	5.33	

- You can also contact us by e-mail : [coilmaster@coilmaster.com](mailto:coilmaster@coilmaster.com)
- All specifications are subject to change without notice.
- Update date : 2018.04.30

## Specifications

Part No.	Inductance ( $\mu$ H) $\pm 20\%$	DCR (m $\Omega$ ) Max.(Typ.)	Isat (A)	I <sub>rms</sub> (A)		SRF (MHz) Typ.
			10% drop	20 °C rise	40 °C rise	
CMI-PQ2011-R50M	0.50	1.34(1.20)	100	30	40	161
CMI-PQ2011-R60M	0.60	1.34(1.20)	90	30	40	124
CMI-PQ2011-R68M	0.68	1.34(1.20)	78	30	40	135
CMI-PQ2011-R80M	0.80	1.34(1.20)	70	30	40	113
CMI-PQ2011-R90M	0.90	1.34(1.20)	62	30	40	104
CMI-PQ2011-1R0M	1.00	1.34(1.20)	56	30	40	97
CMI-PQ2011-1R2M	1.20	1.34(1.20)	49	30	40	81
CMI-PQ2011-2R0M	2.00	1.34(1.20)	37	30	40	56

- Inductance measured at 100kHz, 0.1V<sub>rms</sub>
- Isat1 : DC current at 25°C that causes a 10% (typ) inductance drop from its value without current.
- I<sub>rms</sub> : Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
- Ambient temperature -40°C to +85°C with (40°C rise) I<sub>rms</sub> current.
- Maximum part temperature +125°C (ambient + temp rise). Derating.
- Storage temperature Component: -40°C to +125°C.

IIsan Sales Office (KOREA) +82)31-904-1444  
 Shenzhen Sales Office (CHINA) +86)755-8663-6929  
 Hungary Sales office (EUROPE) +36)30-913-7706

H.K Sales Office (HONGKONG) +852)2711-5551  
 LA Sales Office (USA) +1)866-446-3586

▪ **You can also contact us by e-mail : [coilmaster@coilmaster.com](mailto:coilmaster@coilmaster.com)**

- All specifications are subject to change without notice.
- Update date : 2018.04.30

[www.coilmaster.com](http://www.coilmaster.com)