

CMI-RWCI2012-SERIES

Features


- ▶ Halogen-Free / RoHS compliant.
- ▶ Support operating frequency up to 10GHz.
- ▶ Provide high quality factor.
- ▶ Monolithic structure for high reliability.
- ▶ Excellent solderability and high heat resistance for either flow or reflow soldering.




Applications

- ▶ RF circuit and module.
- ▶ Tablet, Notebook, Desktop computers and peripheral equipment
- ▶ DSC, DVC, LCD Television, Set Top Box.
- ▶ Mobile phone, Smart phone, PND
- ▶ Digital communication equipment
- ▶ Various electronic equipment.

Dimension (Unit:mm)

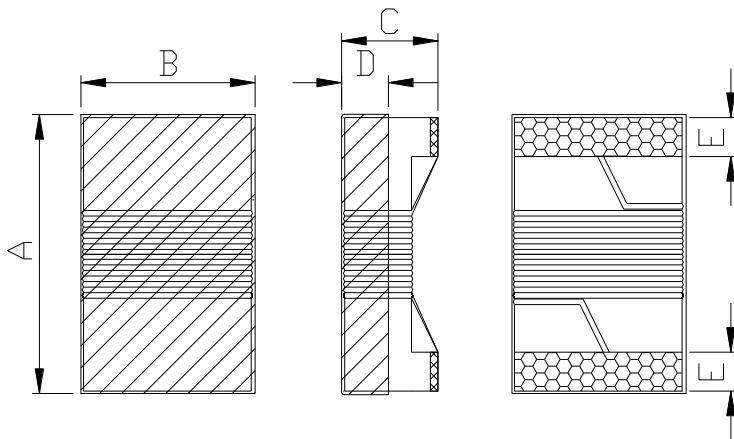


Land Pattern (Unit:mm)

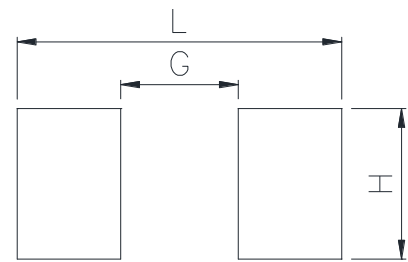

A	B	C	D	E	L	G	H
2.0±0.2	1.25±0.2	1.2±0.2	0.5	0.4±0.1	2.3	1.3	1.3

• You can also contact us by e-mail : coilmaster@coilmaster.com
 • All specifications are subject to change without notice.
 • Update date : 2023.05.10

Regulation of part number



- ① CoilMaster's initial
- ② Product Series Name
- ③ Core Size (unit:mm)
- ④ Inductance Value (1N0 : 1.0 nH)
- ⑤ Inductance Tolerance (S : $\pm 0.3nH$, G : $\pm 2\%$, J : $\pm 5\%$, K : $\pm 10\%$, M : $\pm 20\%$)

Specifications

Part Number	Inductance (nH)	Q Min.	Test Frequency (MHz)		SRF (MHz) Min.	DC Resistance (ohm) Max.	Rated Current (mA) Max.
			L	Q			
CMI-RWCI2012-2N2B,S	2.2	50	250	1000	6000	0.06	800
CMI-RWCI2012-2N7B,S	2.7	35	250	1000	6000	0.08	800
CMI-RWCI2012-3N3B,S	3.3	60	250	1000	6000	0.08	800
CMI-RWCI2012-3N9B,S	3.9	60	250	1000	6000	0.06	600
CMI-RWCI2012-4N7B,S	4.7	60	250	1000	5800	0.06	600
CMI-RWCI2012-5N6B,J,K	5.6	60	250	1000	5800	0.08	600
CMI-RWCI2012-6N8B,J,K	6.8	60	250	1000	5500	0.06	600
CMI-RWCI2012-8N2B,J,K	8.2	60	250	1000	5500	0.06	600
CMI-RWCI2012-10NG,J,K	10	60	250	500	4800	0.08	600
CMI-RWCI2012-12NG,J,K	12	60	250	500	4100	0.08	600
CMI-RWCI2012-15NG,J,K	15	60	250	500	3600	0.08	600
CMI-RWCI2012-18NG,J,K	18	60	250	500	3400	0.08	600
CMI-RWCI2012-22NG,J,K	22	60	250	500	3300	0.10	600
CMI-RWCI2012-27NG,J,K	27	60	250	500	2600	0.12	600
CMI-RWCI2012-33NG,J,K	33	60	250	500	2400	0.15	500
CMI-RWCI2012-39NG,J,K	39	60	250	500	2100	0.18	500
CMI-RWCI2012-47NG,J,K	47	60	200	500	1700	0.15	500
CMI-RWCI2012-56NG,J,K	56	60	200	500	1600	0.25	500
CMI-RWCI2012-68NG,J,K	68	60	200	500	1450	0.27	500
CMI-RWCI2012-82NG,J,K	82	60	150	500	1350	0.32	500
CMI-RWCI2012-R10G,J,K	100	60	150	500	1200	0.43	500
CMI-RWCI2012-R12G,J,K	120	60	150	250	1100	0.48	500

- You can also contact us by e-mail : coilmaster@coilmaster.com
- All specifications are subject to change without notice.
- Update date : 2023.05.10

Part Number	Inductance (nH)	Q Min.	Test Frequency (MHz)		SRF (MHz) Min.	DC Resistance (ohm) Max.	Rated Current (mA) Max.
			L	Q			
CMI-RWCI2012-R15G,J,K	150	50	100	250	950	0.56	400
CMI-RWCI2012-R18G,J,K	180	50	100	250	900	0.78	400
CMI-RWCI2012-R22G,J,K	220	50	100	250	860	1.00	400
CMI-RWCI2012-R27G,J,K	270	45	100	250	850	1.46	350
CMI-RWCI2012-R33G,J,K	330	45	100	250	800	1.65	300
CMI-RWCI2012-R39G,J,K	390	45	100	250	780	2.20	210
CMI-RWCI2012-R47J,K	470	45	252	100	375	0.95	500
CMI-RWCI2012-R56J,K	560	45	25.2	100	340	1.10	450
CMI-RWCI2012-R68J,K	680	35	25.2	100	188	1.20	400
CMI-RWCI2012-R82J,K	820	35	25.2	100	215	1.50	300
CMI-RWCI2012-1R0J,K	1000	35	25.2	50	200	2.13	180
CMI-RWCI2012-1R2J,K	1200	15	7.96	7.96	200	2.38	150
CMI-RWCI2012-1R5J,K	1500	15	7.96	7.96	200	2.90	130
CMI-RWCI2012-1R8J,K	1800	15	7.96	7.96	120	3.00	120
CMI-RWCI2012-2R2J,K	2200	15	7.96	7.96	110	3.10	110
CMI-RWCI2012-2R7J,K	2700	15	7.96	7.96	100	3.50	100
CMI-RWCI2012-3R3J,K	3300	15	7.96	7.96	70	2.30	210
CMI-RWCI2012-3R9J,K	3900	15	7.96	7.96	60	2.50	200
CMI-RWCI2012-4R7J,K	4700	15	7.96	7.96	50	2.80	180
CMI-RWCI2012-5R6J,K	5600	15	7.96	7.96	45	3.00	160
CMI-RWCI2012-6R8J,K	6800	15	7.96	7.96	45	3.20	130
CMI-RWCI2012-8R2J,K	8200	15	7.96	7.96	40	3.50	120
CMI-RWCI2012-100J,K	10000	15	2.52	2.52	40	5.00	80

- Rated Current : the DC current value having temperature increased 40 °c after thru DC current 2 hours at ambient temperature.
- Storage Temperature Range : -40°c ~ +85 °c
- Operating Temperature Range : -40°c ~ +85 °c

Note 1 : Circuit design, component placement, PCB trace size and thickness, airflow and other cooling. Provision all affect the part

Temperature. Part temperature should be verified in the end application.

Korea Sales Office (KOREA)	+82)31-904-1444	H.K Sales Office (HONGKONG)	+852)2711-5551
China Sales Office (CHINA)	+86)0758-683-1444	LA Sales Office (USA)	+1)714-616-6989
Hungary Sales office (EUROPE)	+36)1-404-5832		

- **You can also contact us by e-mail : coilmaster@coilmaster.com**
- All specifications are subject to change without notice.
- Update date : 2023.05.10