

CMT-MT0403M




Features


- ▶ For SMART-DAA solution.
- ▶ RoHS Compliant
- ▶ Surface Mountable package..

Applications

- ▶ Set top boxes, Faxes, EPOS and modems

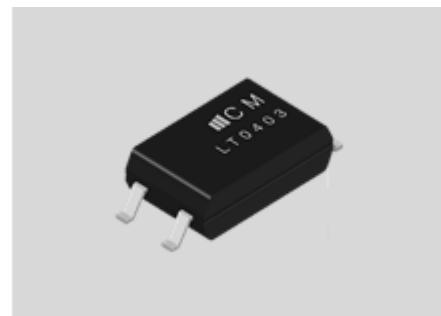


Dimension (Unit:mm)

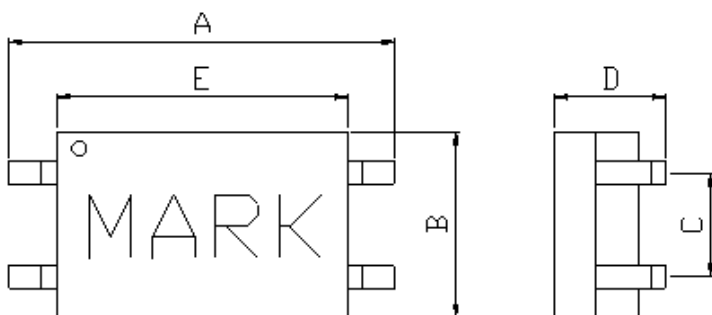


A	B	C	D	E
9.14 Max.	4.39 Max.	2.5±0.1	1.98 Max	6.9 Max

Land Pattern (Unit:mm)

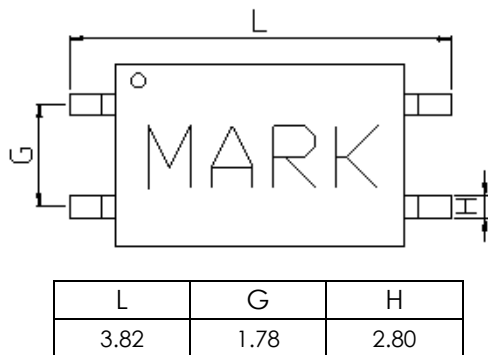

Schematic Diagram

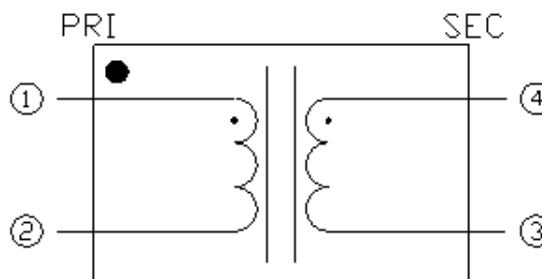

Specifications

Part Number	OCL(μH) Min.		DCR(mΩ) Max.		TURNS RATIO (1-2):(3-4)	HIPOT (1-2):(3-4)
	1-2	3-4	1-2	3-4		
CMT-MT0403M	30	30	225	325	1:1.5±2%	2s Min.

Ilsan Sales Office (KOREA)
 H.K Sales Office (HongKong)
 Shenzhen Sales Office (CHINA)
 LA Sales Office (USA)
 Hungary Sales office (EUROPE)

+82)31-904-1444
 +852)2711-5551
 +0755-8663-6929
 +1)866-446-3586
 +36)30-521-7818

coilmaster@coilmaster.com
coilmaster@coilmaster.com
kimha@coilmaster.com
markyang@coilmaster.com
coilmaster@coilmaster.com

- All specifications are subject to change without notice.
- Update date : 2016.04.22