


CME-CPCF706038V-SERIES

Features


- ▶ It is suitable for surface mount.
- ▶ High impedance characteristic has been achieved a superior effect for common mode noise suppression.
- ▶ Have achieved miniaturization while keeping characteristics by adoption of exclusive square type closed magnetic cores.

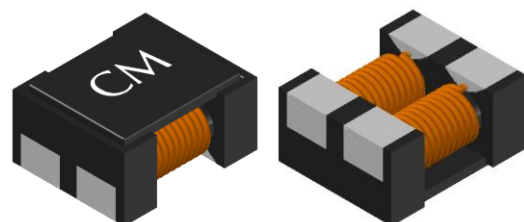

Applications


- ▶ Measures against common mode noise in power lines for various DC power lines, multimedia devices, and various electronic devices, including automotive power trains and safety applications.

Dimension (Unit:mm)

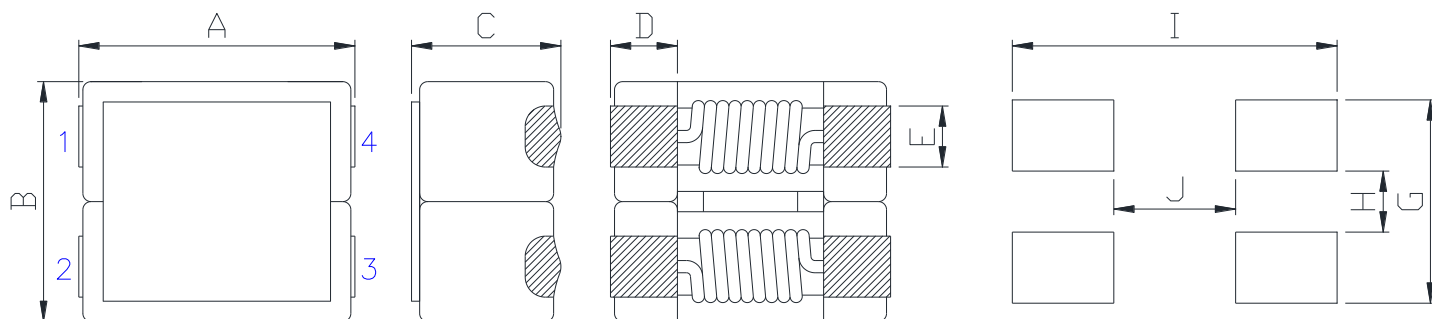


A	B	C	D	E	G	H	L	J
7.5 ±0.8	6.0 ±0.5	3.8 Max.	1.7 Typ.	1.5 Typ.	5.0	1.5	8.0	3.0

Circuit Diagram



- You can also contact us by e-mail : coilmaster@coilmaster.com
- All specifications are subject to change without notice.
- Update date : 2023.08.22

Regulation of part number



- ① CoilMaster's initial
- ② Series Name : Car Power line Common mode Filter
- ③ Size (unit:mm)
- ④ Type
- ⑤ Typical impedance value (300 ohm)
- ⑥ Packing type (Taping)



Specifications

Part Number	Impedance (Ohm) Typ.(Min.)	DCR (mohm) Max.	Rated Current (A) Max.	Insulation resistance (MΩ)min.	Rated voltage (Vdc) max.	Test Frequency (Hz)
CME-CPCF706038V-301T	300(225)	10	4.8	10	80	100M
CME-CPCF706038V-701T	700(500)	16	3.8	10	80	100M

- The Rated current : The DC current at which the temperature rise is $\Delta t=40^{\circ}\text{C}$ (approximately)
- Operating Temperature Range (including self temperature) : $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

Note 1 : Circuit design, component placement, PCB trace size and thickness, airflow and other cooling. Provision all affect the part Temperature. Part temperature should be verified in the end application.

Electrical characteristics

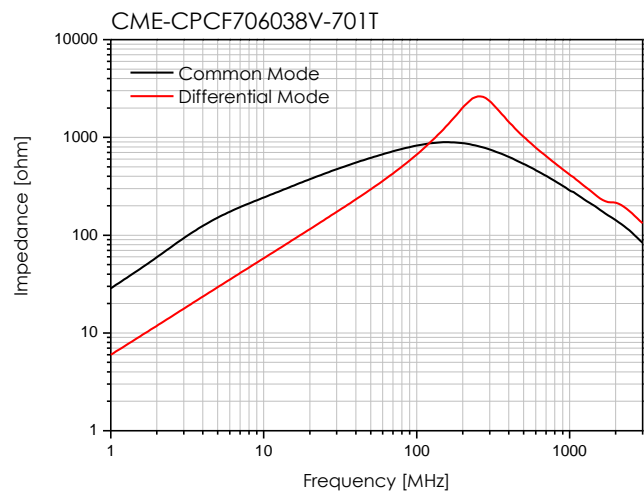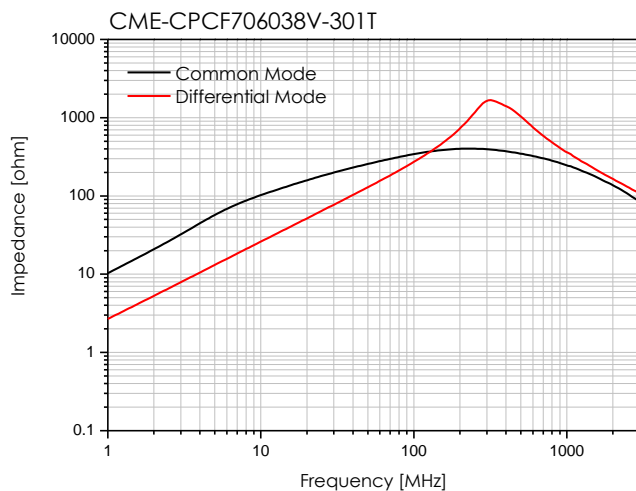


- You can also contact us by e-mail : coilmaster@coilmaster.com
- All specifications are subject to change without notice.
- Update date : 2023.08.22

Packaging


(1) Package quantity : 500 (pcs/reel)

(2) Reel Dimensions (unit:mm)

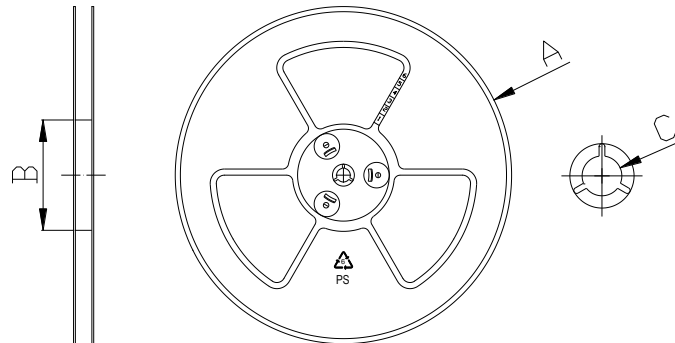

A	B	C
330	100	13

(3) Tape Dimensions

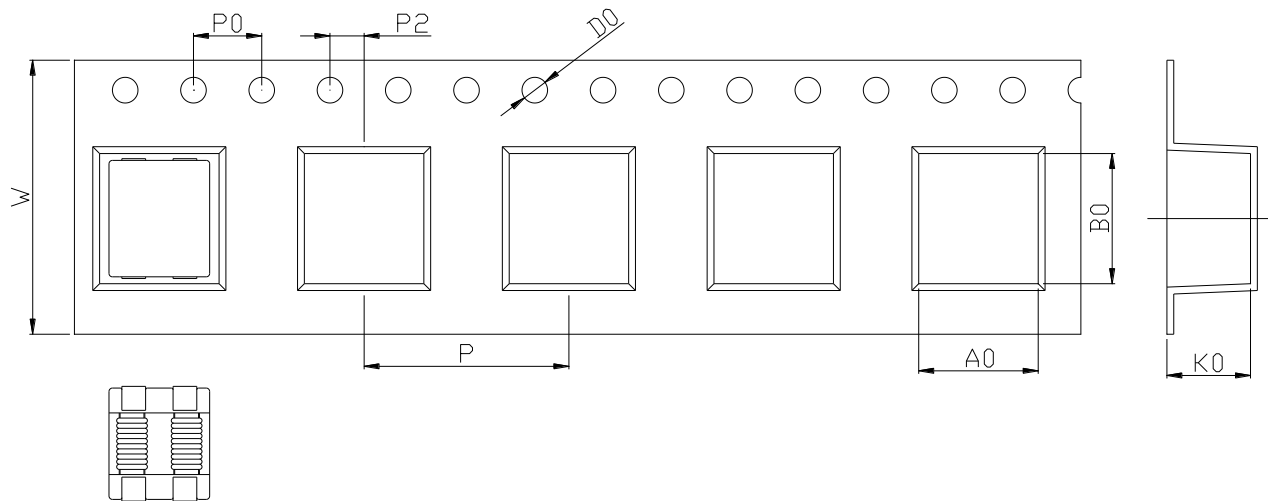

W	A0	B0	K0	P	P0	P2	D0
16.0	7.0	8.3	4.3	12.0	4.0	2.0	1.5

Korea Sales Office (KOREA) +82)31-904-1444
China Sales Office (CHINA) +86)0758-683-1444
Hungary Sales office (EUROPE) +36)1-404-5832

H.K Sales Office (HONGKONG) +852)2711-5551
LA Sales Office (USA) +1)714-616-6989

• You can also contact us by e-mail : coilmaster@coilmaster.com

- All specifications are subject to change without notice.
- Update date : 2023.08.22

www.coilmaster.com