

CMI-CRMCI1005-SERIES

Features


- ▶ Halogen-Free / RoHS compliant.
- ▶ Support operating frequency up to 10GHz.
- ▶ Provide high quality factor.
- ▶ Monolithic structure for high reliability.
- ▶ Excellent solderability and high heat resistance for either flow or reflow soldering.




Applications

- ▶ RF circuit and module.
- ▶ Digital communication equipment
- ▶ Various electronic equipment.
- ▶ Various automotive electronics

Dimension (Unit:mm)

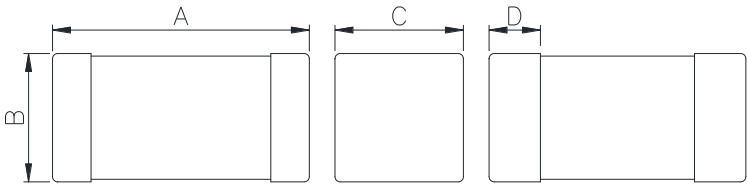


Land Pattern (Unit:mm)

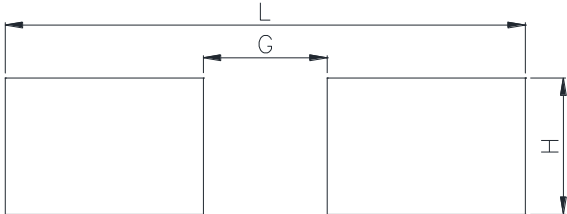

A	B	C	D	L	G	H
1.0±0.05	0.5±0.05	0.5±0.05	0.1~0.3	2.10	0.50	0.55

• You can also contact us by e-mail : coilmaster@coilmaster.com
 • All specifications are subject to change without notice.
 • Update date : 2023.05.10

Regulation of part number



- ① CoilMaster's initial
- ② Product Series Name
- ③ Core Size (unit:mm)
- ④ Inductance Value (1N0 : 1.0 nH)
- ⑤ Inductance Tolerance (S : $\pm 0.3nH$, G : $\pm 2\%$, J : $\pm 5\%$, K : $\pm 10\%$, M : $\pm 20\%$)

Specifications

Part Number	Inductance (nH) S: ± 0.3 , J: $\pm 5\%$	Q Min.	Test Frequency (MHz)	SRF (GHz) Min.	DC Resistance (ohm) Max.	Rated Current (mA) Max.
CMI-CRMCI1005-1N0S	1.0	8	100	10	0.08	300
CMI-CRMCI1005-1N2S	1.2	8	100	10	0.09	300
CMI-CRMCI1005-1N5S	1.5	8	100	6	0.10	300
CMI-CRMCI1005-1N8S	1.8	8	100	6	0.12	300
CMI-CRMCI1005-2N0S	2.0	8	100	6	0.12	300
CMI-CRMCI1005-2N2S	2.2	8	100	6	0.13	300
CMI-CRMCI1005-2N4S	2.4	8	100	6	0.13	300
CMI-CRMCI1005-2N7S	2.7	8	100	6	0.13	300
CMI-CRMCI1005-3N0S	3.0	8	100	6	0.16	300
CMI-CRMCI1005-3N3S	3.3	8	100	6	0.16	300
CMI-CRMCI1005-3N9S	3.9	8	100	4	0.21	300
CMI-CRMCI1005-4N7S	4.7	8	100	4	0.21	300
CMI-CRMCI1005-5N6S	5.6	8	100	4	0.23	300
CMI-CRMCI1005-6N8J	6.8	8	100	3.9	0.25	300
CMI-CRMCI1005-8N2J	8.2	8	100	3.6	0.28	300
CMI-CRMCI1005-10NJ	10	8	100	3.2	0.31	300
CMI-CRMCI1005-12NJ	12	8	100	2.7	0.40	300
CMI-CRMCI1005-15NJ	15	8	100	2.3	0.46	300
CMI-CRMCI1005-18NJ	18	8	100	2.1	0.55	300
CMI-CRMCI1005-22NJ	22	8	100	1.9	0.60	300
CMI-CRMCI1005-27NJ	27	8	100	1.6	0.70	300

- You can also contact us by e-mail : coilmaster@coilmaster.com
- All specifications are subject to change without notice.
- Update date : 2023.05.10




Part Number	Inductance (nH) S: ±0.3, J: ±5%	Q Min.	Test Frequency (MHz)	SRF (GHz) Min.	DC Resistance (ohm) Max.	Rated Current (mA) Max.
CMI-CRMCI1005-33NJ	33	8	100	1.3	0.80	200
CMI-CRMCI1005-39NJ	39	8	100	1.2	0.90	200
CMI-CRMCI1005-47NJ	47	8	100	1.0	1.00	200
CMI-CRMCI1005-56NJ	56	8	100	0.75	1.00	200
CMI-CRMCI1005-68NJ	68	8	100	0.75	1.20	180
CMI-CRMCI1005-82NJ	82	8	100	0.60	1.30	150
CMI-CRMCI1005-R10J	100	8	100	0.60	1.50	150
CMI-CRMCI1005-R12J	120	8	100	0.60	1.60	150

- Rated Current : the DC current value having temperature increased 40 °c after thru DC current 2 hours at ambient temperature.
- Storage Temperature Range : -40°c ~ +85 °c
- Operating Temperature Range : -55°c ~ +125 °c

Note 1 : Circuit design, component placement, PCB trace size and thickness, airflow and other cooling. Provision all affect the part Temperature. Part temperature should be verified in the end application.

- **You can also contact us by e-mail : coilmaster@coilmaster.com**
- All specifications are subject to change without notice.
- Update date : 2023.05.10

Electrical characteristics

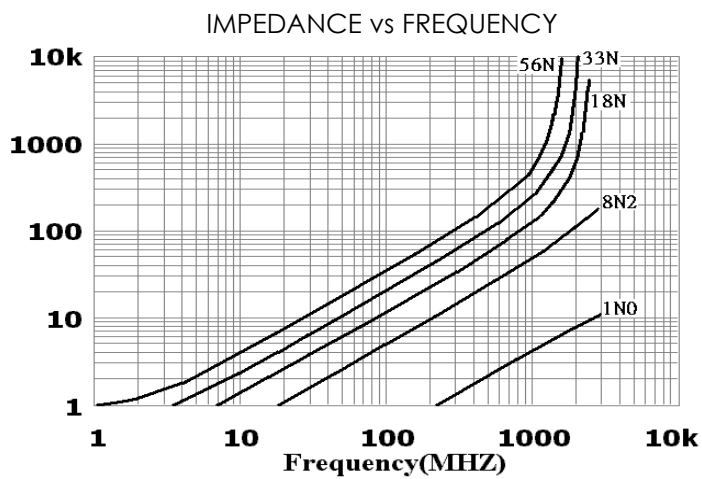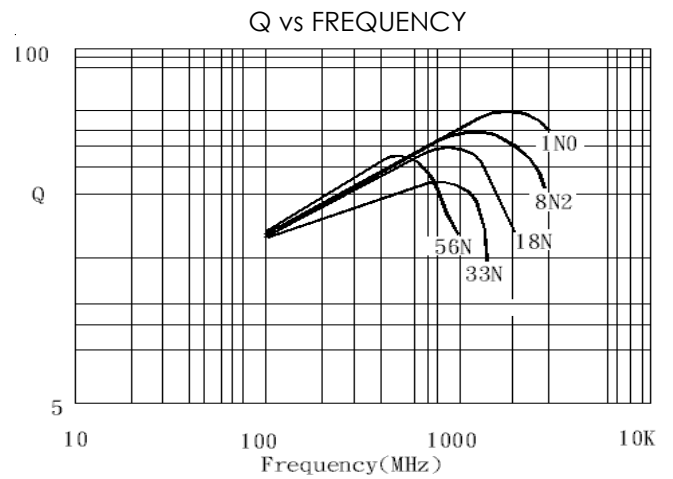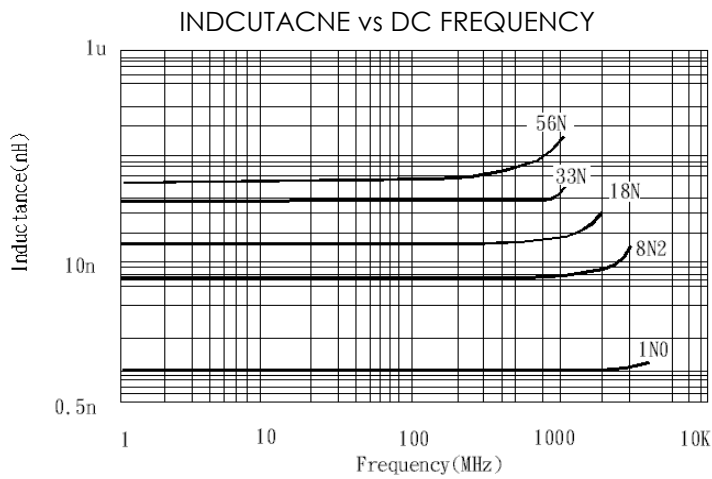


- You can also contact us by e-mail : coilmaster@coilmaster.com
- All specifications are subject to change without notice.
- Update date : 2023.05.10

Packaging


(1) Package quantity : 10,000 (pcs/reel)

(2) Reel Dimensions (unit:mm)

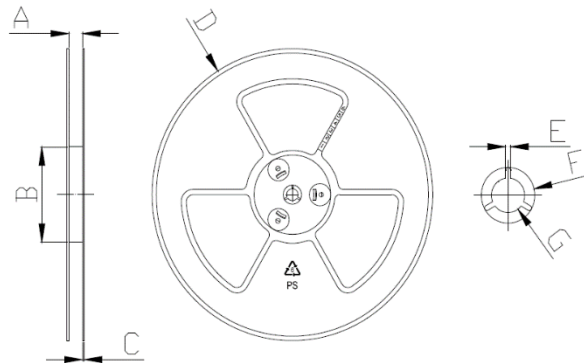

A	B	C	D	E	F	G
10.00	60.00	2.00	178.0	2.00	21.00	13.00
+1.50	+2.00	+0.50	+2.00	+0.50	+0.80	+0.80
-1.50	-2.00	-0.50	-2.00	-0.50	-0.80	-0.80

(3) Tape Dimensions

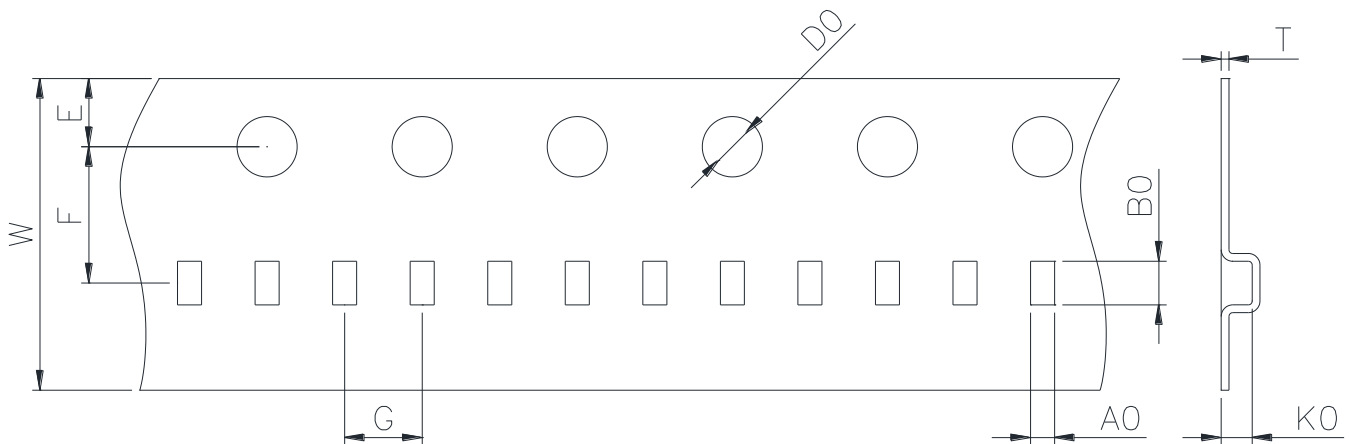

W	A0	B0	T	E	F	G	D0	K0
8.00	0.65	1.15	0.20	1.75	3.50	2.00	1.50	0.80
+0.20	+0.10	+0.10	+0.05	+0.10	+0.05	+0.10	+0.10	+0.05
-0.20	-0.10	-0.10	-0.05	-0.10	-0.05	-0.10	-0.00	-0.05

Korea Sales Office (KOREA)

+82)31-904-1444

H.K Sales Office (HONGKONG)

+852)2711-5551

China Sales Office (CHINA)

+86)0758-683-1444

LA Sales Office (USA)

+1)714-616-6989

Hungary Sales office (EUROPE)

+36)1-404-5832

▪ You can also contact us by e-mail : coilmaster@coilmaster.com

▪ All specifications are subject to change without notice.

▪ Update date : 2023.05.10

www.coilmaster.com