





CMI-MPLD8035SH-SERIES

Size minimize series, a new design for highest current in smallest size


Features

- ▶ High current and precision DCR.
- ▶ Ferrite core type for EMC protection.
- ▶ RoHS compliant / Halogen-Free.


Applications

- ▶ Server, workstation and storage systems.
- ▶ Desktop and Notebook.
- ▶ Graphics cards and battery power systems.
- ▶ Multi-phase and VCORE regulators.
- ► Voltage Regulator Modules (VRMs)
- ▶ Point-of-Load modules.
- ► DCR Sensing circuits.


Dimension (Unit:mm)

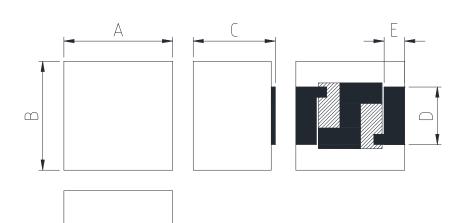

Α	В	С	D	Е
8.1±0.3	6.5±0.3	3.5 Max	2.9±0.3	1.5±0.3



Land Pattern (Unit:mm)



L	G	Н
9.2	4.9	4.0

- You can also contact us by e-mail: coilmaster@coilmaster.com
- All specifications are subject to change without notice.
- Update date: 2022.01.11

Regulation of part number



- 1 CoilMaster's initial
- 2) Series Name: Magnetic Pin Low Dcr Power inductor
- 3 Core Size (unit:mm)
- 4 Type
- (5) Typical inductance value (0.15uH)
- 6 Inductance tolerance (±20%)

Specifications

Part Number	Inductance (uH) ±20%	DCR(mohm) ±10%	lsat(A) typ.		Irms(A)
ran Number			T _{amb} =25 °C	T _{amb} =125 °C	Тур.
CMI-MPLD8035SH-R15M	0.15	1.90	53	40	30
CMI-MPLD8035SH-R22M	0.22	1.90	36	27	30
CMI-MPLD8035SH-R30M	0.30	1.90	26	19.5	30
CMI-MPLD8035SH-R47M	0.47	1.90	17	12.5	30

- Test Frequency: 100kHz, 25 °c
- Isat: When based on the inductance change rate (approximately 30% below in the initial value)
- Irms: When based on the temperature increase (Temperature increase of approximately 40°c by self heating)
- Operating Temperature Range(including self temperature): -40°c ~ +125°c

Note 1: Circuit design, component placement, PCB trace size and thickness, airflow and other cooling. Provision all affect the part Temperature. Part temperature should be verified in the end application.

> Ilsan Sales Office (KOREA) +82)31-904-1444 Shenzhen Sales Office (CHINA) +86)755-8663-6929

Hungary Sales office (EUROPE) +36)30-913-7706

H.K Sales Office (HONGKONG) +852)2711-5551 LA Sales Office (USA) +1)866-446-3586

- All specifications are subject to change without notice.
- Update date: 2022.01.11