

CMI-MPLD90100BS-SERIES


A new construction design for better shielding

Features

- ▶ High current and precision DCR.
- ▶ Ferrite core type for EMC protection.
- ▶ RoHS compliant / Halogen-Free.


Applications

- Server, workstation and storage systems.
- Desktop and Notebook.
- Graphics cards and battery power systems.
- Multi-phase and VCORE regulators.
- Voltage Regulator Modules (VRMs)
- ▶ Point-of-Load modules.
- ► DCR Sensing circuits.

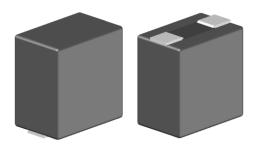

Dimension (Unit:mm)

Land Pattern (Unit:mm)

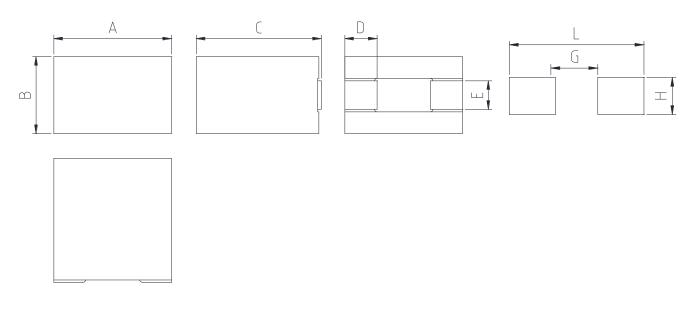

| А | В | С | D | E |
|---------|---------|----------|---------|---------|
| 9.5±0.3 | 6.2±0.3 | 10.0 Max | 2.6±0.3 | 2.3±0.3 |


| L | G | Н | |
|------|-----|-----|--|
| 10.5 | 3.3 | 2.9 | |

• You can also contact us by e-mail : coilmaster@coilmaster.com

• All specifications are subject to change without notice.

• Update date : 2022.01.11

Regulation of part number



- 1) CoilMaster's initial
- ② Series Name : Magnetic Pin Low Dcr Power inductor
- ③ Core Size (unit:mm)
- ④ Type
- (5) Typical inductance value (0.10uH)
- 6 Inductance tolerance (±20%)

Specifications

| Part Number | Inductance (uH) ±20% | DCR(mohm) ±10% | lsat(A) typ. | | lrms(A) |
|----------------------|-------------------------|-------------------|------------------------------|-------------------------------|---------|
| Farr Number | | | T_{amb}=25 °C | T_{amb}=125 °C | Тур. |
| CMI-MPLD90100BS-R10M | 0.10 | 0.17 | 100 | 75 | 60 |
| CMI-MPLD90100BS-R12M | 0.12 | 0.17 | 95 | 70 | 60 |
| CMI-MPLD90100BS-R15M | 0.15 | 0.17 | 80 | 60 | 60 |
| CMI-MPLD90100BS-R18M | 0.18 | 0.17 | 60 | 45 | 60 |
| CMI-MPLD90100BS-R22M | 0.22 | 0.17 | 50 | 37.5 | 60 |
| CMI-MPLD90100BS-R30M | 0.30 | 0.17 | 28 | 21 | 60 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Test Frequency: 100kHz, 25 °c

• Isat: When based on the inductance change rate (approximately 30% below in the initial value)

• Irms: When based on the temperature increase (Temperature increase of approximately 40°c by self heating)

• Operating Temperature Range(including self temperature) : -40°c ~ +125°c

Note 1 : Circuit design, component placement, PCB trace size and thickness, airflow and other cooling. Provision all affect the part Temperature. Part temperature should be verified in the end application.

| llsan Sales Office (KOREA) | +82)31-904-1444 | | |
|-------------------------------|-------------------|--|--|
| Shenzhen Sales Office (CHINA) | +86)755-8663-6929 | | |
| Hungary Sales office (EUROPE) | +36)30-913-7706 | | |

 H.K Sales Office (HONGKONG)
 +852)2711-5551

 LA Sales Office (USA)
 +1)866-446-3586

• You can also contact us by e-mail : coilmaster@coilmaster.com

All specifications are subject to change without notice.

• Update date : 2022.01.11