



CMI-MPLD9480M1-SERIES


A typical type of high current, inductor with precision DCR.

Features

- ▶ High current and precision DCR.
- ▶ Ferrite core type for EMC protection.
- ▶ RoHS compliant / Halogen-Free.




- ▶ Server, workstation and storage systems.
- ▶ Desktop and Notebook.
- ▶ Graphics cards and battery power systems.
- ▶ Multi-phase and VCORE regulators.
- ► Voltage Regulator Modules (VRMs)
- ▶ Point-of-Load modules.
- ▶ DCR Sensing circuits.

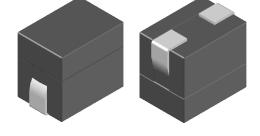

Dimension (Unit:mm)

Land Pattern (Unit:mm)

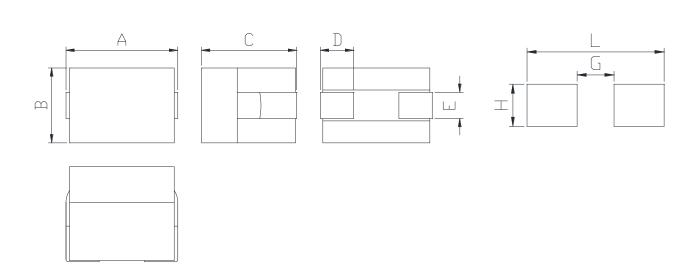


Α	В	С	D	Е
9.4±0.4	6.3±0.4	8.0 Max	2.8±0.4	2.2±0.4

L	G	Н	
10.4	2.8	3.2	

- You can also contact us by e-mail: coilmaster@coilmaster.com
- All specifications are subject to change without notice.
- Update date: 2022.01.10

Regulation of part number



- 1 CoilMaster's initial
- 2) Series Name: Magnetic Pin Low Dcr Power inductor
- 3 Core Size (unit:mm)
- 4 Type
- (5) Typical inductance value (0.12uH)
- 6 Inductance tolerance (±20%)

Specifications

David Name have	Inductance (uH) ±20%	DCR(mohm) ±10%	Isat(A) typ.		Irms(A)
Part Number			T _{amb} =25 °C	T _{amb} =125 °C	Typ.
CMI-MPLD9480M1-R12M	0.12	0.29	80.00	56.00	51.00
CMI-MPLD9480M1-R15M	0.15	0.29	65.00	45.00	51.00
CMI-MPLD9480M1-R22M	0.22	0.29	40.00	28.00	51.00
CMI-MPLD9480M1-R30M	0.30	0.29	30.00	20.00	51.00

- Test Frequency: 100kHz, 25 °c
- Isat: When based on the inductance change rate (approximately 30% below in the initial value)
- Irms: When based on the temperature increase (Temperature increase of approximately 40°c by self heating)
- Operating Temperature Range(including self temperature): -40°c ~ +125°c

Note 1: Circuit design, component placement, PCB trace size and thickness, airflow and other cooling. Provision all affect the part Temperature. Part temperature should be verified in the end application.

> Ilsan Sales Office (KOREA) Shenzhen Sales Office (CHINA) +86)755-8663-6929

+82)31-904-1444

H.K Sales Office (HONGKONG) +852)2711-5551 LA Sales Office (USA)

Hungary Sales office (EUROPE) +36)30-913-7706

• All specifications are subject to change without notice.