


T1/CEPT/ISDN-PRI トランスフォーマ

RoHS Compliant

Mechanicals:

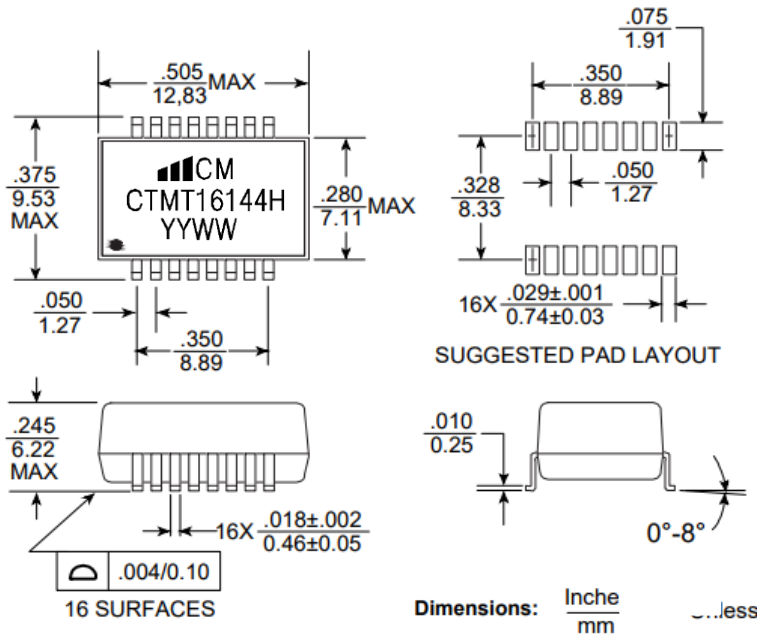


Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$

Electrical Specifications: @25°C

- 巻数比 (Pri: SEC $\pm 5\%$): 1CT:1CT & 1CT:2.4CT
- OCL 一次側 @25°C (mH MIN): 1.00 & 1.00
- L_L : .80 & .80 μ H Max.
- 結合容量: 30 & 30 pF Max.
- 1次側直流抵抗: 0.85 & 0.85 Ω Max.
- 絶縁耐圧: 1500 Vrms MIN
- 梱包仕様/回路図: 1
- 1次側ピン: 9-11, 1-3

Schematics:

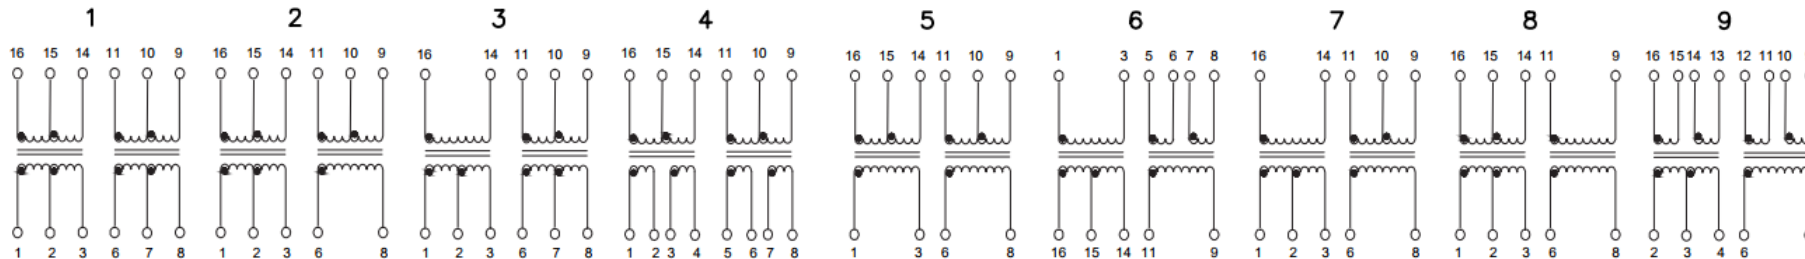

*Specification Subject to Change Without Notice

www.coilmaster.com

