

CMI-CMMPP10040LH-SERIES



Features


- ▶ High current and low profile.
- ▶ Metal powder molding type for EMC protection.
- ▶ Available tape and reel for auto insertion.
- ▶ RoHS compliant
- ▶ AEC-Q200 qualified.
- ▶ Halogen-Free

Applications

- ▶ Equipment using for automobiles (ECM, airbags, headlights, electronic Powder steering, motors, ABS, other)




Dimension (Unit:mm)

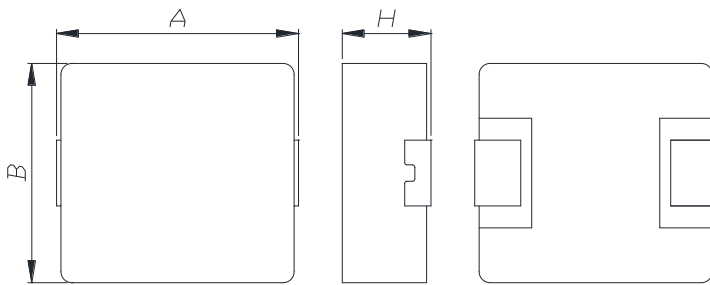

A	B	H
10.85±0.5	10.0±0.4	4.0 Max

Land Pattern (Unit:mm)



L	G	H
13.6	5.4	4.1

Specifications

Part Number	Inductance (uH) ±20%	DCR(mohm) Max(Typ)	IDC1(A) Max(Typ)	IDC2(A) Max(Typ)	Test Frequency (Hz)
CMI-CMMPP10040LH-2R2M	2.2	10.8(9.0)	27.00(30.00)	13.00(14.00)	1M
CMI-CMMPP10040LH-4R7M	4.7	16.8(14.0)	22.00(24.00)	11.50(12.50)	1M
CMI-CMMPP10040LH-100M	10	36.0(14.0)	14.50(15.50)	7.00(7.50)	1M
CMI-CMMPP10040LH-150M	15	54.0(45.0)	12.50(13.50)	6.00(6.50)	1M

- IDC1: When based on the inductance change rate (approximately 30% below in the initial value)
- IDC2: When based on the temperature increase (Temperature increase of approximately 40°C by self heating)
- Operating Temperature Range(including self temperature) : -40°C ~ +165 °C

Ilisan Sales Office (KOREA) +82)31-904-1444
 Shenzhen Sales Office (CHINA) +86)755-8663-6929
 Hungary Sales office (EUROPE) +36)30-913-7706

H.K Sales Office (HONGKONG) +852)2711-5551
 LA Sales Office (USA) +1)866-446-3586

• You can also contact us by e-mail : coilmaster@coilmaster.com

- All specifications are subject to change without notice.
- Update date : 2017.11.03

www.coilmaster.com