

CMI-CSSP10040NH-SERIES



Features


- ▶ Magnetic shield type wound inductor for power circuits.
- ▶ Available tape and reel for auto insertion.
- ▶ RoHS compliant
- ▶ AEC-Q200 qualified.
- ▶ Halogen-Free

Applications

- ▶ Car navigation, car stereo and car accessories only (Not available for use related to driving, curving, stopping, and the other safety.)




Dimension (Unit:mm)

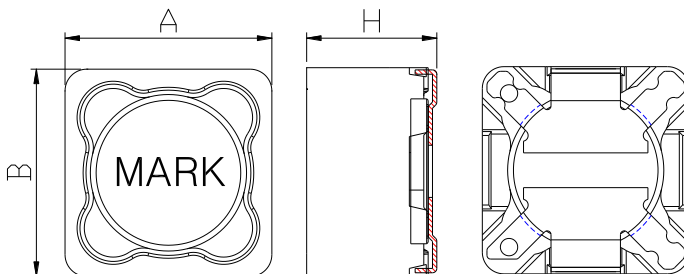

A	B	H
10.0±0.3	10.0±0.3	4.0 Max

Land Pattern (Unit:mm)

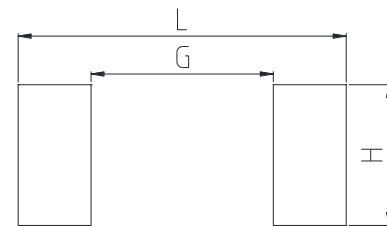

L	G	H
10.8	5.8	4.9

Specifications

Part Number	Inductance (uH)	Tolerance (±)	DCR (mohm) ±20%	IDC1(A) Max	IDC2(A) Max	Test Frequency (Hz)
CMI-CSSP10040NH-150M	15	20%	48	3.40	4.00	100k
CMI-CSSP10040NH-470M	47	20%	120	2.00	2.60	100k
CMI-CSSP10040NH-101M	100	20%	250	1.40	1.50	100k
CMI-CSSP10040NH-221M	220	20%	565	0.85	1.20	100k

- IDC1: When based on the inductance change rate (approximately 30% below in the initial value)
- IDC2: When based on the temperature increase (Temperature increase of approximately 40°C by self heating)
- Operating Temperature Range(including self temperature) : -40°C ~ +165 °C

Ilsan Sales Office (KOREA) +82)31-904-1444
 Shenzhen Sales Office (CHINA) +86)755-8663-6929
 Hungary Sales office (EUROPE) +36)30-913-7706

H.K Sales Office (HONGKONG) +852)2711-5551
 LA Sales Office (USA) +1)866-446-3586

• You can also contact us by e-mail : coilmaster@coilmaster.com

- All specifications are subject to change without notice.
- Update date : 2017.12.22

www.coilmaster.com